


## FXHX220 Plate Mounting Double Sided Tape



### Composition:

---

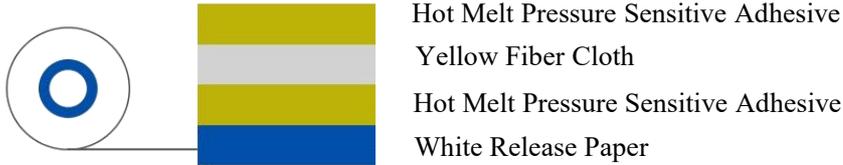

Hot Melt Pressure Sensitive Adhesive  
Yellow Fiber Cloth  
Hot Melt Pressure Sensitive Adhesive  
White Release Paper

### Applications:

---

- Ideal for printing applications such as cartons, woven bags, books and periodicals.
- Widely used for material bonding, die-cutting and mounting flexographic, rubber, resin plates.
- Suitable for various printing tasks, including flexo post-printing of corrugated cardboard, flexo film printing with compressible sleeves, letterpress label printing, etc.

### Features:

---

- Strong adhesion without edge lifting or displacement.
- Plate removal is easy and labor-saving, leaving no residue.
- Surface is uniform with excellent conformability during lamination.

### Technical Data (average values)

▪ Total Thickness	0.22mm
▪ Backing material	Yellow Fiber Cloth
▪ Release Paper Color	White
▪ Type of adhesive	Holt Melt Pressure Sensirive Adhesive
▪ Holding Power	8H/25mm

• Loop Tack	≥28#
• 180° Peel Adhesion	20N/25mm
• Width	20mm-1020mm
• Length	3m-10m

### **Application Properties:**

1. To obtain optimal adhesion, the bonding surface must be dry and clean.
2. The ideal application temperature range is 20°C to 40°C. To apply tape on surface at temperature below 10°C be not recommend, because the adhesive becomes firm to adhere lightly.

**Test Method:** In accordance with GB/T 4851-1998 method.

### **Shelf Life:**

12 months when stored in original carton at 23°C and 65% relative humidity

### **Other:**

- Rewinding length commonly used: 55m /roll, and can be processed according to customer demand
- Special carton packaging